



Schwienbacher Abbruch Technik



Werkstatt • Lager • Service seit 1977

D-82229 Seefeld (bei München)

Graf-Toerring-Seefeld-Strasse 9b / 17

Tel. 08152 / 998 969-0 Fax.- 9

T.75 Verstärkter LÖFFEL *optimal** für Bagger von 43 bis 55 to

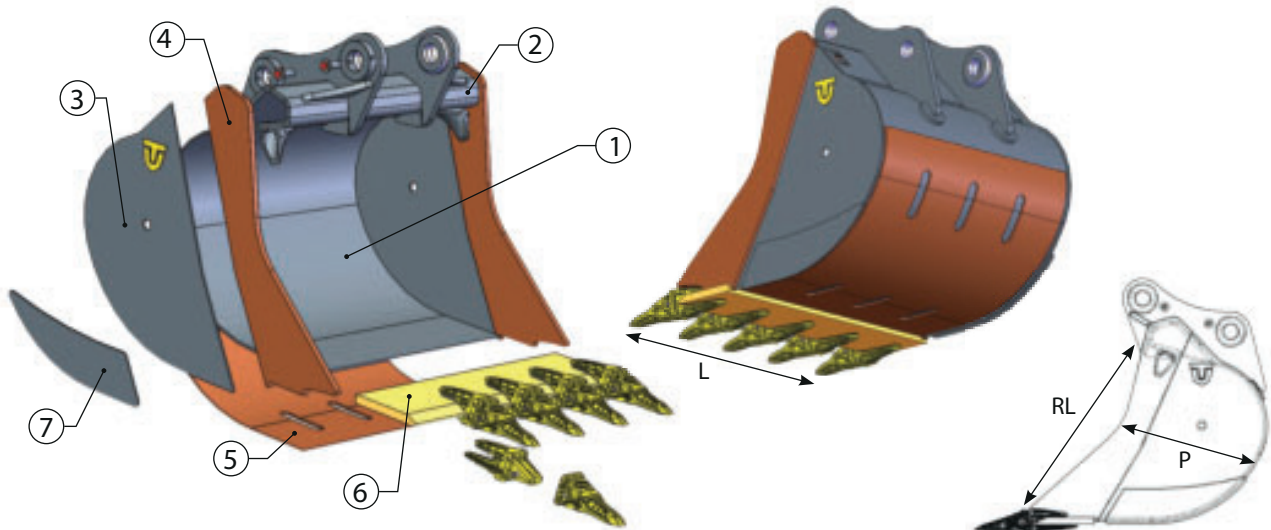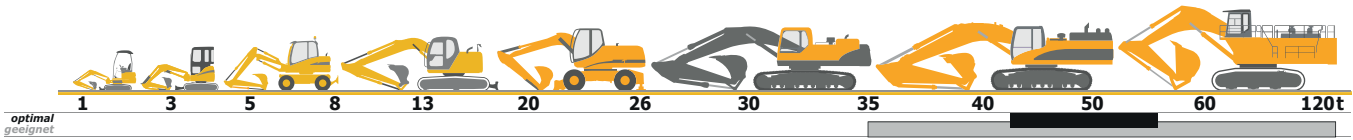

Classe Class	Codice Code	L mm	Cap. SAE Lt	Denti n° Teeth	Peso Kg Weight	RL mm	P mm	CAT J460	FEURST FK11TLR	ESCO U45 S
T.75 43 - 55 ton	WHR075-120	1200	1792	4	2018	1480	1070	12.752,00	13.916,00	14.220,00
	WHR075-130	1300	1983	4	2102			13.334,00	14.550,00	14.870,00
	WHR075-140	1400	2175	4	2187			13.916,00	15.186,00	15.520,00
	WHR075-150	1500	2369	4	2272			14.688,00	16.028,00	16.380,00
	WHR075-160	1600	2563	5	2402			15.272,00	16.664,00	17.032,00
	WHR075-170	1700	2757	5	2487			15.852,00	17.300,00	17.680,00
	WHR075-180	1800	2951	5	2571			16.410,00	17.906,00	18.302,00
	WHR075-190	1900	3145	6	2702			16.994,00	18.544,00	18.952,00
	WHR075-200	2000	3340	6	2786			17.576,00	19.180,00	19.602,00
	WHR075-210	2100	3534	6	2871			18.268,00	19.934,00	20.372,00
	WHR075-220	2200	3728	6	2956			18.958,00	20.686,00	21.142,00
		1	2	3	4	5	6	7	8	
Materiale	Material	S355	S355	S355	Hardox 400	Hardox 400	Hardox 400	S355	Hardox 400	
Spessore	Thickness	12 mm	25 mm	12 mm	40 mm	15 mm	400 x 50 mm	12 mm	12 mm	

Info: 05/2021



Schwienbacher Abbruch Technik



Werkstatt • Lager • Service seit 1977

D-82229 Seefeld (bei München)

Graf-Toerring-Seefeld-Strasse 9b / 17

Tel. 08152 / 998 969-0 Fax.- 9

T.75 Verstärkter LÖFFEL *optimal** für Bagger von 43 bis 55 to

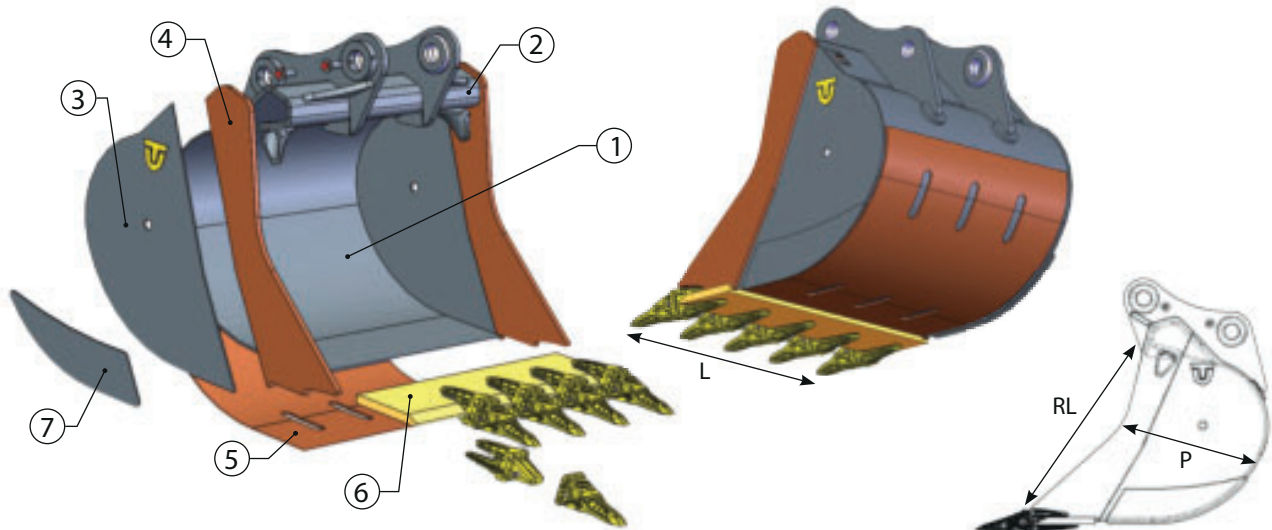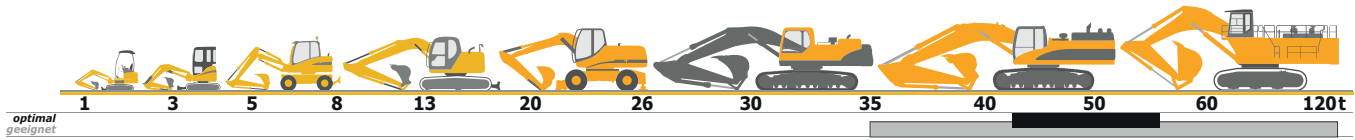

T.75 **optimal* = für Bagger von **43 bis 55 t** mit Standard-Ausrüstung.

AKERMANN H 25D * **ATLAS** 2204 * **BENATI** 525, 610, 3.45 * **CASE** 9046, CX 460, CX 470B-C, CX 470BME, CX 490D, CX 500DME * **CATERPILLAR** 235C/D, 245C, 345B/C/D, 235 ME, 245D, 350, 352F, 352 FXE * **JON DEERE** 470 GLC, 470G * **DAEWOO DOOSAN** S 450III/V, S 470LCV, S 500LCV, DX 460, DX 480, DX 520, DX 490LC-5, DX 530LC-5 * **FIATALLIS** FE 40/FE 45 * **FIAT HITACHI** FH 450.3 * **FIAT KOBELCO** EX 455LCH/BEN * **HITACHI** ZX 470LC-6, ZX 470LCH-5G, ZX 490LCH-6, ZX 500LC, ZX 520LCH-3F, ZX 530LCH-6 * **HYDROMAC** H 230/H 270 * **HYUNDAI** R 420LC, HX 380L * **JCB** JS 450, JS 460L, JS 500 * **KOBELCO** 914, 916, SK 460LC, SK 480LC, SK 500LC-10 * **KOMATSU** PC 450-7/8, PC 490LC-11, PC 500, PC 550 * **LIEBHERR** R 954B/C LIT, R 952 LIT, R 954 LIT, R 954C, R 956 LIT, R 954 SHD, R 960 SME * **MF** 550 * **NEW HOLLAND** E 485C, E 485 LCH/BEH * **O&K** RH 12.5/RH 14 * **PMI** 2200, 9.50 * **POCLAIN** 220/220 CKB/300 * **SANY** SY 365H, SY 375H * **SAMSUNG** SY 500 * **VOLVO** EC 450, EC 460B/C, EC 480D, EC 480E *

geeignet = für Bagger von **40 bis 60 t** je nach Ausrüstung.

Andere **Klassen/Größen** bedingt geeignet. Bei Bedarf bitte anfragen!