



# Schwiebacher Abbruch Technik



Werkstatt • Lager • Service seit 1977

## D-82229 Seefeld (bei München)

Graf-Toerring-Seefeld-Strasse 9b / 17

Tel. 08152 / 998 969-0 Fax.- 9

### T.50 STEIN-LÖFFEL *optimal\** für Bagger von 9,6 bis 12,5 to

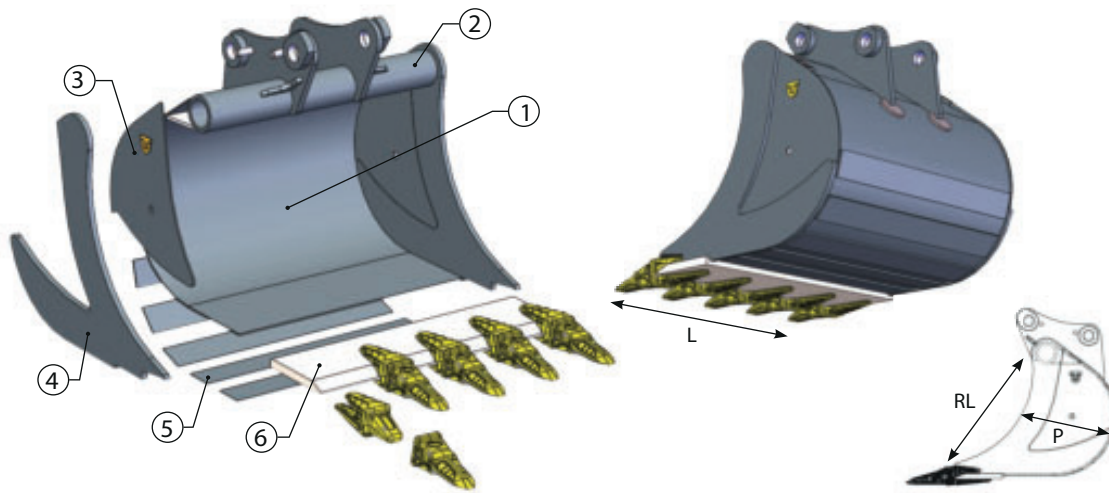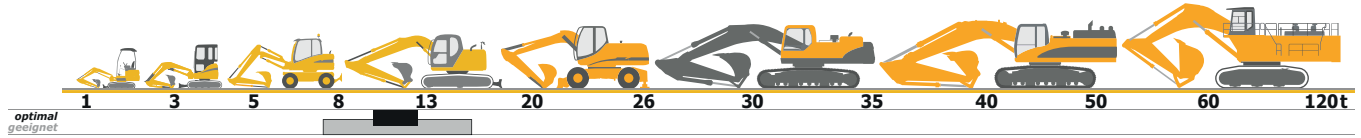

Classe Class	Codice Code	L mm.	Cap. SAE Lt.	Denti n° Teeth	Peso Kg. Weight	RL mm.	P mm.	CAT J250	FEURST FK4 TLR	ESCO U25 S
T.50 9,6 - 12,5 ton	WAA050-030	300	99	2	175	818	504	2.280,0 0	2.488,00	2.584,00
	WAA050-040	400	148	3	212			2.418,00	2.638,00	2.842,00
	WAA050-050	500	199	3	242			2.518,00	2.748,00	2.938,00
	WAA050-060	600	253	4	264			2.592,0 0	2.830,00	3.136,00
	WAA050-070	700	308	4	284			2.684,0 0	2.930,00	3.230,00
	WAA050-080	800	364	4	304			2.750,0 0	3.000,00	3.298,00
	WAA050-090	900	421	5	326			2.884,0 0	3.148,00	3.552,00
	WAA050-100	1000	479	5	350			2.998,0 0	3.274,00	3.668,00
	WAA050-110	1100	535	5	385			3.114,0 0	3.396,00	3.786,00
		1	2	3	4	5	6	7	8	
Materiale	Material	S355	S355	S355	S355	S355	EN 25 0	/	/	
Spessore	Thickness	6 mm	127 x 14 mm	6 mm	20 mm	80 x 8 mm	270 x 32 m m	/	/	



# Schwie nbacher **A** bbruch **T** echnik



Werkstatt • Lager • Service <sup>seit 1977</sup>

**D-82229 Seefeld** (bei München)

Graf-Toerring-Seefeld-Strasse 9b / 17

**Tel. 08152 / 998 969-0 Fax.- 9**

## **T.50** STEIN-LÖFFEL *optimal\** für Bagger von 9,6 bis 12,5 to

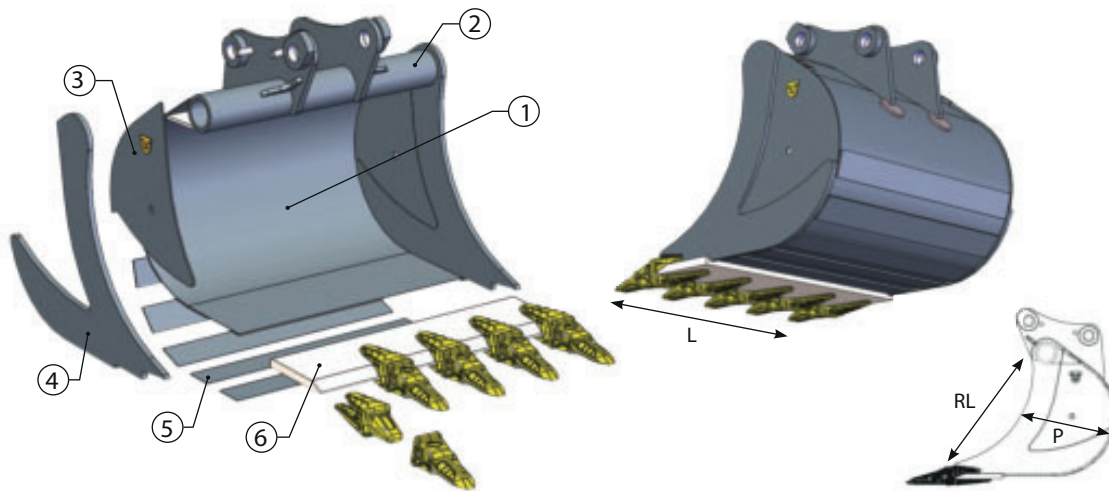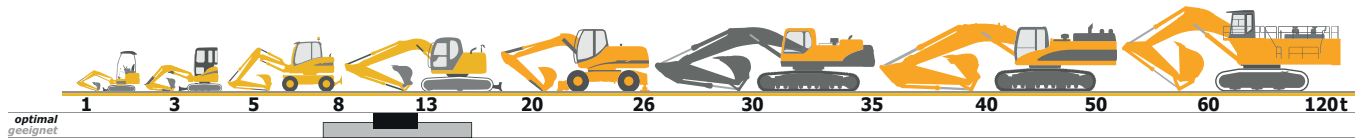

### **T.50** \* *optimal* = für Bagger von 9,6 bis 12,5 t mit Standard-Ausrüstung.

**AKERMANN** H 3B \* **ATLAS** 1104, 1204 \* **BENATI** 3.12R \* **BENFRA** 3R, 3C \* **BOBCAT** 444 \* **CASE** WX 120, 488 \* **CATERPILLAR** 311 FLRR \* **COSMOTER** BAT10 0 \* **EUROMACH** 9000, 9500 \* **FIAT HITACHI** FH 115W, FH 120W, EX 100, FH 115, FH 125W \* **FIAT KOBELCO** E 115SR, EX 125W \* **HYUNDAI** R 110LC7 \* **JCB** JS 110, JZ 115, 100C, HYDROADIG 110W \* **KOBELCO** SK 100, SK 115SR \* **KOMATSU** PC 110R, PC 110R1, PW 110R, PW 118, PC 118, PC 118MR-8, PW 98MR-8, PW 118MR-8 \* **LALTESI** 40/111 \* **LIEBHERR** A 309, A 310, A 311, A 910CPT LIT \* **Macmoter** M 12M/BW 110 \* **MECALAC** 14 MX, 14 MBX, 12 MTX \* **NEW HOLLAND** MH 2.6, MH 3.6, E 115SR \* **O&K** MH 2.10/MH 3.5; PMI 450/810R/913 \* **TEREX** HR 42, TW 110, TC 125 \* **VENERI** VF 10.23D \* **MF** 250 \* **WACKER NEUSON** 11002 RD, 12002 RD, 1454, EW 100 \* **YANMAR** Vio 100, SV 100-2, SV 100-2PB

*geeignet* = für Bagger von 7,5 bis 16 t je nach Ausrüstung.

Andere **Klassen/Größen** bedingt geeignet. Bei Bedarf bitte anfragen!